

Ultra High Power Type

# 3.8kWh Battery Module

Gen.2



- › Highly versatile air cooling module suitable for a wide range of applications
- › Industry-leading high power performance (Up to 8 C-rate)
- › High reliability and unparalleled safety
- › Long cycle and calendar life (Over 8,000 cycles and up to 15 years\*)
- › Efficient thermal management via air vent holes
- › Easy to transport, install, and maintain
- › Modular design combined with high scalability
- › Highly intelligent BMS\*\* for sophisticated system control and monitoring

\*Depending on the load profile, the warranty condition may differ / \*\*BMS: Battery Management System

## System Configuration

Item	Specification	Remarks
Type A	Up to 6 modules in parallel	Module + KEPM-150-B48-ES-A1
Type B	Up to 24 modules in series & parallel	Module + KEPM-150-E12/24-ES-A1
Type C	Up to 12 modules in series	Module + BPU + Fuse Box

## Module Specification

### Model: KBM-255-S-14S-UHP-75-38-EM-A

Item	Specification	Remarks	
<b>Electrical</b>			
Module Configuration	1P14S	Cell: 130255255P (75Ah)	
Installed Energy	3.8kWh	-	
Usable Energy	3.5kWh	@ 1P discharge, BOL	
Nominal Voltage	51.8Vdc	-	
Operating Voltage Range	46.9 ~ 57.8Vdc	-	
Max. Charge Power	7.7kW	@ 2P, 1 Cycle	
Max. Charge Current	150A	@ 2C, 1 Cycle	
Rated Charge Power	3.8kW	@ 1P	
Rated Charge Current	75A	@ 1C	
Peak Discharge Power	31.0kW	@ 8P, ≤10 sec, ≥SOC 50 %	
Peak Discharge Current	600A	@ 8C, ≤10 sec, ≥SOC 50%	
Max. Discharge Power	15.5kW	@ 4P, 1 Cycle	
Max. Discharge Current	300A	@ 4C, 1 Cycle	
Rated Discharge Power	3.8kW	@ 1P	
Rated Discharge Current	75A	@ 1C	
Round Trip DC Efficiency	>95%	@ 1P, BOL	
Control Power	Type A	DC 48V Internal Power	-
	Type B	DC 12/24V External Power	-
	Type C	DC 24V External Power	-
<b>Mechanical</b>			
Dimension	285 (W) x 218 (D) x 324 (H) mm	±2mm	
Weight	Approx. 33.7kg	-	
<b>Communication</b>			
Communication Interface	Type A & B	CAN2.0B	-
	Type C	Ethernet/RS-485	ModBus TCP/ModBus RTU
Monitoring	Type A, B, C	RS-232C	-
<b>Environment</b>			
Operating Temperature	Charging	0 ~ 10°C	@ <0.2P
		10 ~ 35°C	@ <2P
		35 ~ 45°C	@ <1P
	Discharging	0 ~ 55°C	-
Operating Temperature		22 ~ 28°C	Recommended
Storage Humidity		<60 ± 25% RH	Non-condensing
Storage Temperature	1 Year	-20 ~ 25°C	SOC 50 ± 5%
	6 Months	25 ~ 35°C	
	3 Months	35 ~ 45°C	
	< 1 Week	45 ~ 60°C	
<b>Expected Cycle &amp; Calendar Life**</b>			
Cycle Life @ DoD 90%	≥6,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Cycle Life @ DoD 80%	≥8,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Calendar Life	Up to 15 years	-	
<b>Certification</b>			
Certifications	UL1642, UL1973, CE, UN38.3	@ Cell Level	

\*P : Power-rate / C : Current-rate

\*\*Depending on the load profile, the warranty condition may differ


# KEPM-150-B48-ES-A1 Specification

**Model: KEPM-150-B48-ES-A1**

Item	Specification	Remarks
<b>General</b>		
Embedded Safety Devices	String BMS, contactor, fuse, etc.	-
<b>Electrical</b>		
Input Supply Power	DC 48V Internal Power	-
On/ Off Management	Wake Up On/Off (Dry Contact)	-
String BMS self-consumption	<5W	-
Operating Max. Voltage	57.8Vdc	-
Operating Max. Current	250A	-
<b>Mechanical</b>		
Dimension	345 (W) x 235 (D) x 140 (H) mm	-
Weight	Approx. 5kg	-
<b>Communication</b>		
Communication Interface	CAN2.0B	-
Monitoring	RS-232C	-

\*The KEPM-150-B48-ES-A1 does not support serial connection

## Up to 6 Modules in parallel

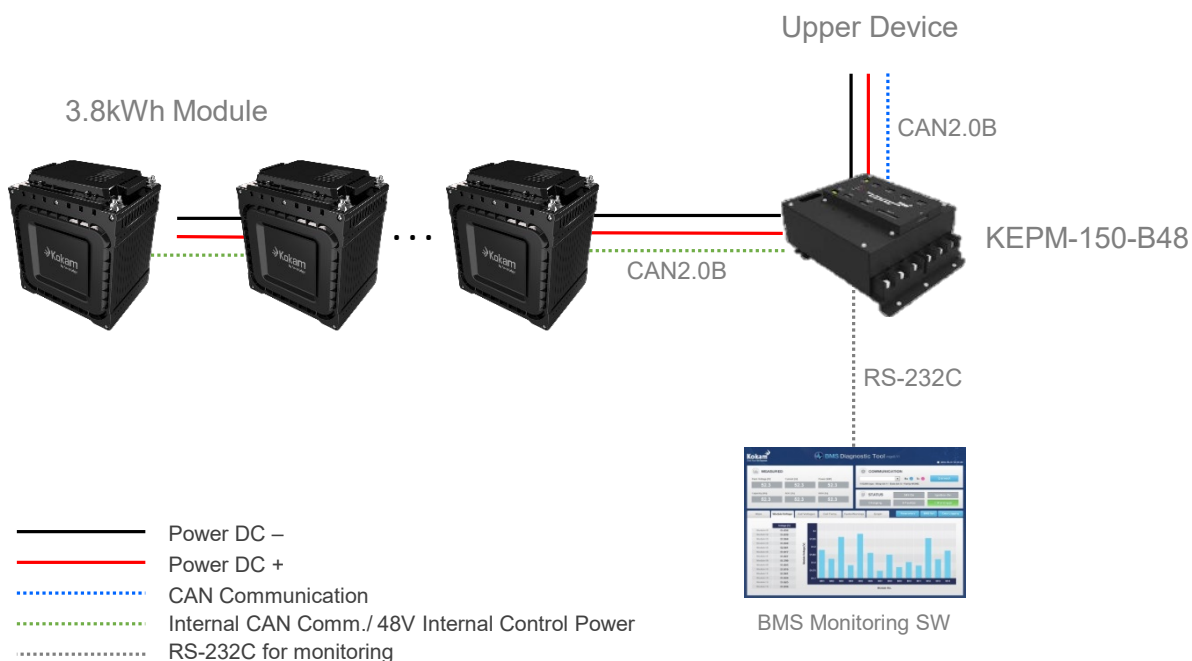

\*The products above are references. The actual products may look different.

# KEPM-150-E12/E24-ES-A1 Specification



Model: KEPM-150-E12/E24-ES-A1

Item	Specification		Remarks
	KEPM-150-E12-ES-A1	KEPM-150-E24-ES-A1	
<b>General</b>			
Embedded Safety Devices	String BMS, contactor, fuse, etc.		-
<b>Electrical</b>			
Input Supply Power	DC 12V External Power @ Max. Current 10A	DC 24V External Power @ Max. Current 5A	-
On/ Off Management	Wake Up On/Off (Dry Contact)		-
String BMS self-consumption	<5W		-
Operating Max. Voltage	700Vdc		-
Operating Max. Current	250A		-
<b>Mechanical</b>			
Dimension	345 (W) x 235 (D) x 140 (H) mm		-
Weight	Approx. 5kg		-
<b>Communication</b>			
Communication Interface	CAN2.0B		-
Monitoring	RS-232C		-

\*KEPM-150-E12/24-ES-A1 supports serial and parallel connection

## Up to 12S2P (Maximum 24 modules)

## Up to 4S6P (Maximum 24 modules)

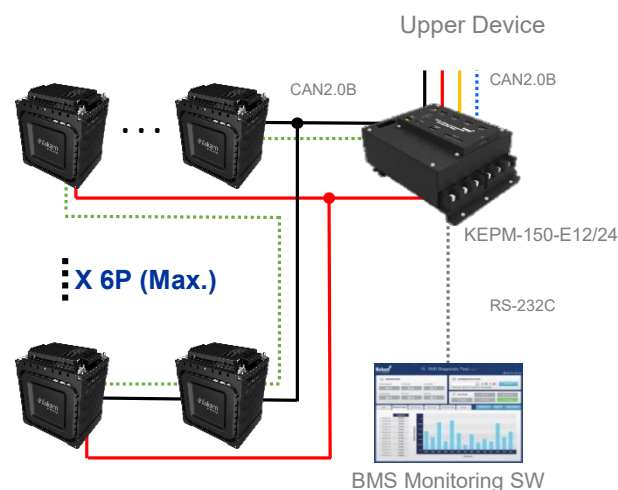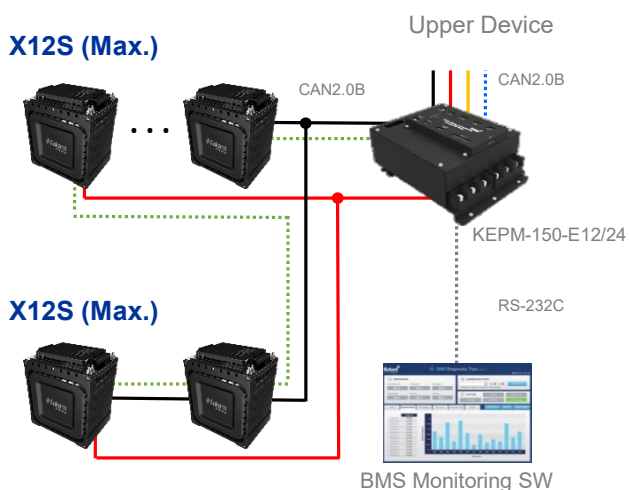

- Power DC -
- Power DC +
- 12/24V External Control Power
- ..... CAN Communication
- ..... Internal CAN Comm./ Control Power
- ..... RS-232C for monitoring

\*The products above are references. The actual products may look different.

# BPU Specification

**Model: KBPU-1kV-160-E24-ES-A2**

Item	Specification	Remarks
<b>General</b>		
Embedded Safety Devices	String BMS, switch disconnecter contactor, etc.	Fuse box is provided separately
<b>Electrical</b>		
Input Supply Power	DC 24V External Power	@ Max. Current 5A
On/ Off Management	Manual Switch	-
String BMS self-consumption	<2.5W	-
Switch Disconnect	T1D	-
Operating Max. Voltage	1,000Vdc	-
Operating Max. Current	160A	-
<b>Mechanical</b>		
Dimension	320 (W) x 450 (D) x 230 (H) mm	-
Weight	15kg	± 5%
IP Grade	20	-
<b>Communication</b>		
Communication Interface	Ethernet/RS-485	ModBus TCP/ModBus RTU
Monitoring	RS-232C	-


\*The BPU does not support parallel connection

# Fuse Box Specification

**Model: MS-HI-A026**

Item	Specification	Remarks
<b>Electrical</b>		
Rated Voltage	1,500Vdc	-
Rated Current	200A	-
Rated Breaking Capacity	30kA	-
<b>Mechanical</b>		
Dimension	300 (W) x 180 (D) x 136 (H) mm	± 2mm, case size
Weight	4kg	± 5%
IP Grade	20	-

# Up to 12 Modules in series

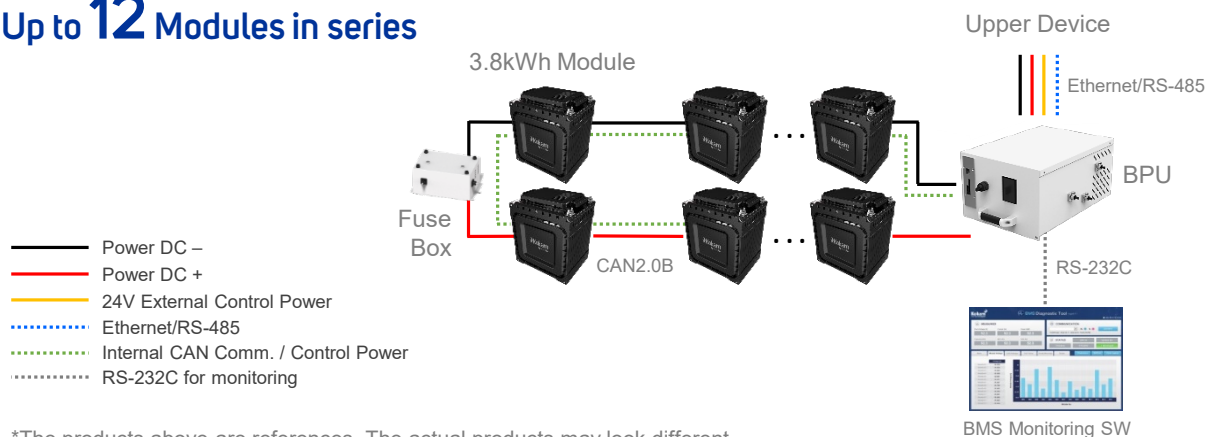

\*The products above are references. The actual products may look different.

## DISCLAIMERS OF WARRANTIES:

All materials and services on this document are provided "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose, or the warranty of non-infringement. This document could include technical or other mistakes, inaccuracies or typographical errors. Kokam assumes no responsibility for errors or omissions in the information, documents, software, materials and/or services which are referenced by or linked to this document. Kokam does not grant any express or implied right to any person or business entity under any patents, copyrights, trademarks, or trade secret information with respect to the materials and services. No portion of the information or documents may be reproduced in any form or by any means without the prior written consent of kokam. In no event shall kokam be liable to any person or business entity for any special, punitive, incidental, indirect or consequential damages based on any use of this document.