

Ultra High Power Type

# 11.1kWh Battery Module



- › Highly versatile air cooling module suitable for a wide range of applications
- › Industry-leading high power performance (Up to 8 C-rate)
- › High reliability and unparalleled safety
- › Long cycle and calendar life (Over 8,000 cycles and up to 15 years\*)
- › Efficient thermal management via air vent holes
- › Easy to transport, install, and maintain
- › Modular design combined with high scalability
- › Highly intelligent BMS\*\* for sophisticated system control and monitoring

\*Depending on the load profile, the warranty condition may differ / \*\*BMS: Battery Management System

## System Configuration

Item	Specification	Remarks
Configuration	Up to 12 modules in series	Module + BPU + Fuse Box

## Module Specification

### Model: KBM-255P-F-20S-UHP-75-111-IM-C

Item	Specification	Remarks	
<b>Electrical</b>			
Module Configuration	2P20S	Cell: 130255255P (75Ah)	
Installed Energy	11.1kWh	-	
Usable Energy	10.2kWh	@ 1P discharge, BOL	
Nominal Voltage	74.0Vdc	-	
Operating Voltage Range	67.0~82.6Vdc	-	
Max. Charge Power	22.2kW	@ 2P, 1 Cycle	
Max. Charge Current	300A	@ 2C, 1 Cycle	
Rated Charge Power	11.1kW	@ 1P	
Rated Charge Current	150A	@ 1C	
Peak Discharge Power	88.8kW	@ 8P, ≤10 sec, ≥SOC 50%	
Peak Discharge Current	1,200A	@ 8C, ≤10 sec, ≥SOC 50%	
Max. Discharge Power	44.4kW	@ 4P, 1 Cycle	
Max. Discharge Current	600A	@ 4C, 1 Cycle	
Rated Discharge Power	11.1kW	@ 1P	
Rated Discharge Current	150A	@ 1C	
Round Trip DC Efficiency	>95%	@ 1P, BOL	
Control Power	DC 74V Internal Power	-	
<b>Mechanical</b>			
Dimension	310 (W) x 687 (D) x 318 (H) mm	± 2mm	
Weight	Approx. 97kg	-	
<b>Communication</b>			
Communication Interface	Ethernet/RS-485/CAN2.0B	ModBus TCP/ModBus RTU	
Monitoring	RS-232C	-	
<b>Environment</b>			
Operating Temperature	Charging	0 ~ 10°C	@ <0.2P
		10 ~ 35°C	@ <2P
		35 ~ 45°C	@ <1P
	Discharging	0 ~ 55°C	-
Operating Temperature		22 ~ 28°C	Recommended
Storage Humidity		<60 ± 25% RH	Non-condensing
Storage Temperature	1 Year	-20 ~ 25°C	SOC 50 ± 5%
	6 Months	25 ~ 35°C	
	3 Months	35 ~ 45°C	
	< 1 Week	45 ~ 60°C	
<b>Expected Cycle &amp; Calendar Life**</b>			
Cycle Life @ DoD 90%	≥6,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Cycle Life @ DoD 80%	≥8,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Calendar Life	Up to 15 years	-	
<b>Certification</b>			
Certification	UL1642, UL1973, CE, UN38.3	@ Cell Level	

\*P : Power-rate / C : Current-rate

\*\*Depending on the load profile, the warranty condition may differ

# BPU Specification

**Model: MS-BU-A035-IS-A**

Item	Specification	Remarks
<b>General</b>		
Embedded Safety Devices	String BMS, Switch Disconnecter, contactor, etc.	Fuse box is provided separately
<b>Electrical</b>		
Input Supply Power	AC 220V External Power	100~260Vac
On/ Off Management	Manual Switch	-
String BMS self-consumption	<3.6W	-
Switch Disconnect	1,100Vdc	-
Operating Max. Current	500A	-
<b>Mechanical</b>		
Dimension	490 (W) x 450 (D) x 285 (H) mm	± 5%
Weight	32kg	± 5%
IP Grade	20	-
<b>Communication</b>		
Communication Interface	Ethernet/RS-485/CAN2.0B	ModBus TCP/ModBus RTU
Monitoring	RS-232C	-


\*The BPU does not support parallel connection

# Fuse Box Specification

**Model: MA-HI-A003**

Item	Specification	Remarks
<b>Electrical</b>		
Rated Voltage	1,100Vdc	-
Rated Current	500A	-
Rated Breaking Capacity	47kA for DC	-
<b>Mechanical</b>		
Dimension	390 (W) x 195 (D) x 152 (H) mm	± 2mm, excluding connectors
Weight	Approx. 5kg	-
IP Grade	20	-

# Up to 12 Modules in series

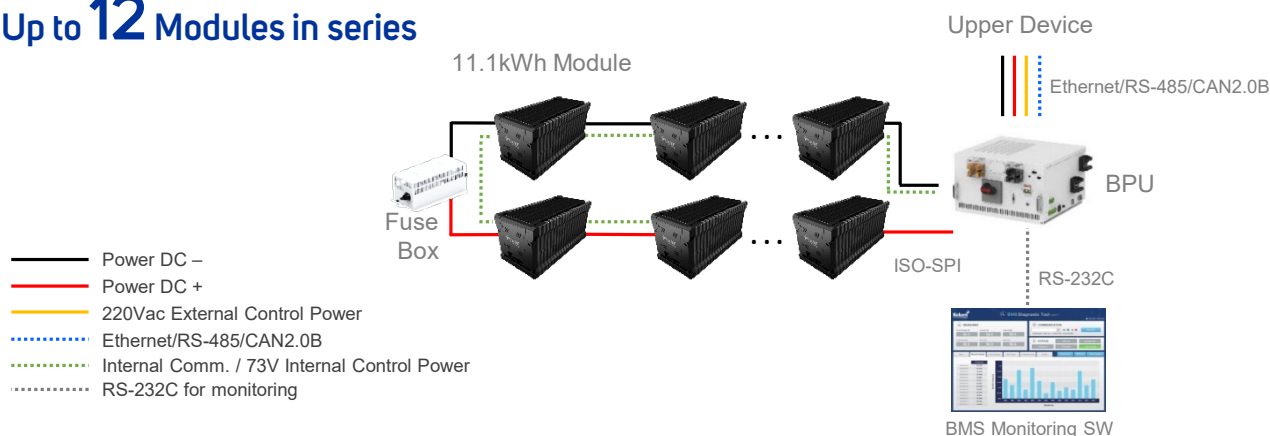

\*The products above are references. The actual products may look different.

## DISCLAIMERS OF WARRANTIES:

All materials and services on this document are provided "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose, or the warranty of non-infringement. This document could include technical or other mistakes, inaccuracies or typographical errors. Kokam assumes no responsibility for errors or omissions in the information, documents, software, materials and/or services which are referenced by or linked to this document. Kokam does not grant any express or implied right to any person or business entity under any patents, copyrights, trademarks, or trade secret information with respect to the materials and services. No portion of the information or documents may be reproduced in any form or by any means without the prior written consent of kokam. In no event shall kokam be liable to any person or business entity for any special, punitive, incidental, indirect or consequential damages based on any use of this document.