


Ultra High Power Type

33kWh Battery Rack

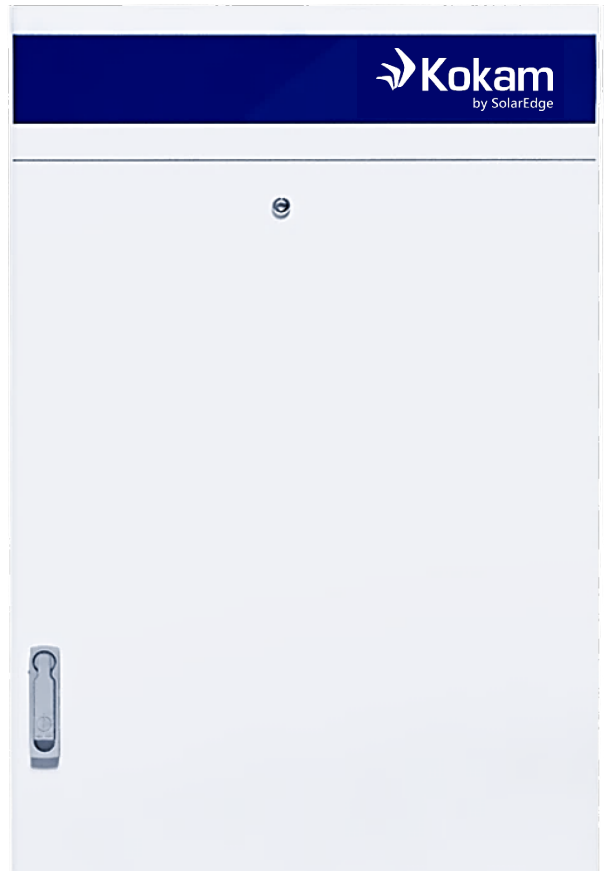

- › Highly advanced lithium-ion battery solution for mission-critical applications
- › Industry-leading high power performance (Up to 10 C-rate)
- › Pre-assembled solution for ease of installation and maintenance
- › Exceedingly small footprint due to high energy density
- › 2-pole and 3-pole topology available
- › High reliability and unparalleled safety
- › Long cycle and calendar life (Over 8,000 cycles and up to 15 years*)
- › Highly intelligent BMS** for sophisticated system control and monitoring

*Depending on the load profile, the warranty condition may differ / **BMS: Battery Management System

Battery Rack Specification

Model: KUPSI-1C4RT2-33-UP

Item	Specification	Remarks	
Electrical			
Rack Configuration	4 modules in series	Cell: 130255255P (75Ah)	
Module Configuration	1P30S	-	
Installed Energy	33kWh	-	
Usable Energy	30kWh	@ 1P discharge, BOL	
Nominal Voltage	444Vdc	-	
Operating Voltage Range	384 ~ 495Vdc	-	
Float Voltage	495Vdc	-	
Max. Charge Power	66kW	@ 2P, 1 Cycle	
Max. Charge Current	150A	@ 2C, 1 Cycle	
Rated Charge Power	33kW	@ 1P	
Rated Charge Current	75A	@ 1C	
Max. Discharge Power	333kW	@ 10P, ≤6 min., 1 Cycle	
Max. Discharge Current	750A	@ 10C, ≤6 min., 1 Cycle	
Rated Discharge Power	33kW	@ 1P	
Rated Discharge Current	75A	@ 1C	
Round Trip DC Efficiency	>95%	@ 1P, BOL	
Control Power	AC 100~240V, 50/60Hz	1ph, 2 wire	
Mechanical			
Dimension	580 (W) x 740 (D) x 1,960 (H) mm	-	
Weight	Approx. 500kg	-	
IP Grade	20	-	
Communication			
Communication Interface	Ethernet/RS-485	ModBus TCP/ModBus RTU	
Monitoring	RS-232C	-	
Environment			
Operating Temperature	Charging	0 ~ 10°C	@ <0.2P
		10 ~ 35°C	@ <2P
		35 ~ 45°C	@ <1P
	Discharging	0 ~ 55°C	-
Operating Temperature		18 ~ 28°C	Recommended
Storage Humidity		<60 ± 25% RH	Non-condensing
Storage Temperature	1 year	-20 ~ 25°C	SOC 50 ± 5%
	6 months	25 ~ 35°C	
	3 months	35 ~ 45°C	
	<1 week	45 ~ 60°C	
Expected Cycle & Calendar Life**			
Cycle Life @ DoD 90%	≥6,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Cycle Life @ DoD 80%	≥8,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Calendar Life	Up to 15 years	-	
Certifications			
Certifications	UL1642, UL1973, CE, UN38.3	@ Cell level	

*P : Power-rate / C : Current-rate


**Depending on the load profile, the warranty condition may differ

DISCLAIMERS OF WARRANTIES:

All materials and services on this document are provided "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose, or the warranty of non-infringement. This document could include technical or other mistakes, inaccuracies or typographical errors. Kokam assumes no responsibility for errors or omissions in the information, documents, software, materials and/or services which are referenced by or linked to this document. Kokam does not grant any express or implied right to any person or business entity under any patents, copyrights, trademarks, or trade secret information with respect to the materials and services. No portion of the information or documents may be reproduced in any form or by any means without the prior written consent of kokam. In no event shall kokam be liable to any person or business entity for any special, punitive, incidental, indirect or consequential damages based on any use of this document.

Ultra High Power Type

36kWh Battery Rack

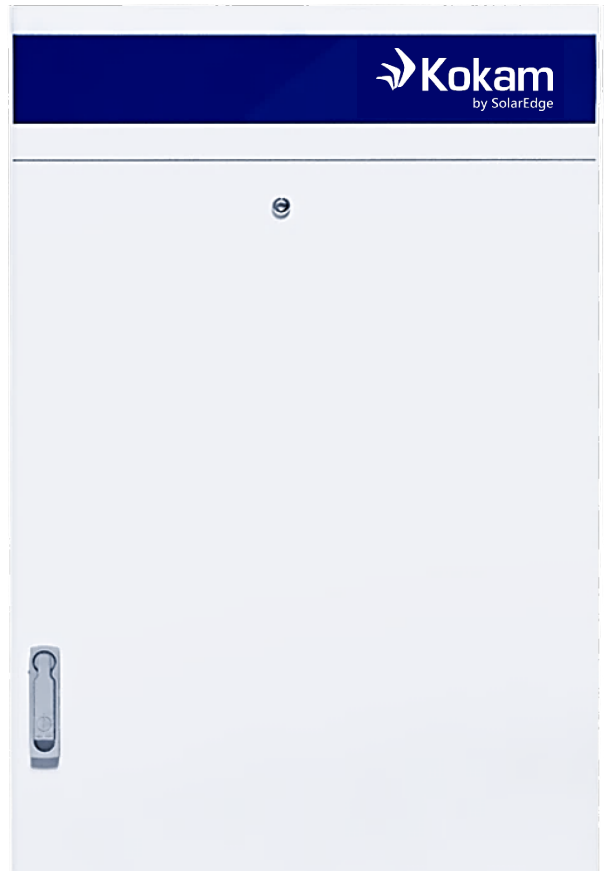

- › Highly advanced lithium-ion battery solution for mission-critical applications
- › Industry-leading high power performance (Up to 10 C-rate)
- › Pre-assembled solution for ease of installation and maintenance
- › Exceedingly small footprint due to high energy density
- › 2-pole and 3-pole topology available
- › High reliability and unparalleled safety
- › Long cycle and calendar life (Over 8,000 cycles and up to 15 years*)
- › Highly intelligent BMS** for sophisticated system control and monitoring

*Depending on the load profile, the warranty condition may differ / **BMS: Battery Management System

Battery Rack Specification

Model: KUPSI-1C4RT2-36-UP

Item	Specification	Remarks	
Electrical			
Rack Configuration	4 modules in series	Cell: 130255255P (75Ah)	
Module Configuration	1P33S	-	
Installed Energy	36kWh	-	
Usable Energy	33kWh	@ 1P discharge, BOL	
Nominal Voltage	488Vdc	-	
Operating Voltage Range	422 ~ 545Vdc	-	
Float Voltage	545Vdc	-	
Max. Charge Power	73kW	@ 2P, 1 Cycle	
Max. Charge Current	150A	@ 2C, 1 Cycle	
Rated Charge Power	36kW	@ 1P	
Rated Charge Current	75A	@ 1C	
Max. Discharge Power	366kW	@ 10P, ≤6 min., 1 Cycle	
Max. Discharge Current	750A	@ 10C, ≤6 min., 1 Cycle	
Rated Discharge Power	36kW	@ 1P	
Rated Discharge Current	75A	@ 1C	
Round Trip DC Efficiency	>95%	@ 1P, BOL	
Control Power	AC 100~240V, 50/60Hz	1ph, 2 wire	
Mechanical			
Dimension	580 (W) x 740 (D) x 1,960 (H) mm	-	
Weight	Approx. 550kg	-	
IP Grade	20	-	
Communication			
Communication Interface	Ethernet/RS-485	ModBus TCP/ModBus RTU	
Monitoring	RS-232C	-	
Environment			
Operating Temperature	Charging	0 ~ 10°C	@ <0.2P
		10 ~ 35°C	@ <2P
		35 ~ 45°C	@ <1P
	Discharging	0 ~ 55°C	-
Operating Temperature		18 ~ 28°C	Recommended
Storage Humidity		<60 ± 25% RH	Non-condensing
Storage Temperature	1 year	-20 ~ 25°C	SOC 50 ± 5%
	6 months	25 ~ 35°C	
	3 months	35 ~ 45°C	
	<1 week	45 ~ 60°C	
Expected Cycle & Calendar Life**			
Cycle Life @ DoD 90%	≥6,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Cycle Life @ DoD 80%	≥8,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Calendar Life	Up to 15 years	-	
Certifications			
Certifications	UL1642, UL1973, CE, UN38.3	@ Cell level	

*P : Power-rate / C : Current-rate


**Depending on the load profile, the warranty condition may differ

DISCLAIMERS OF WARRANTIES:

All materials and services on this document are provided "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose, or the warranty of non-infringement. This document could include technical or other mistakes, inaccuracies or typographical errors. Kokam assumes no responsibility for errors or omissions in the information, documents, software, materials and/or services which are referenced by or linked to this document. Kokam does not grant any express or implied right to any person or business entity under any patents, copyrights, trademarks, or trade secret information with respect to the materials and services. No portion of the information or documents may be reproduced in any form or by any means without the prior written consent of kokam. In no event shall kokam be liable to any person or business entity for any special, punitive, incidental, indirect or consequential damages based on any use of this document.

Ultra High Power Type

38kWh Battery Rack

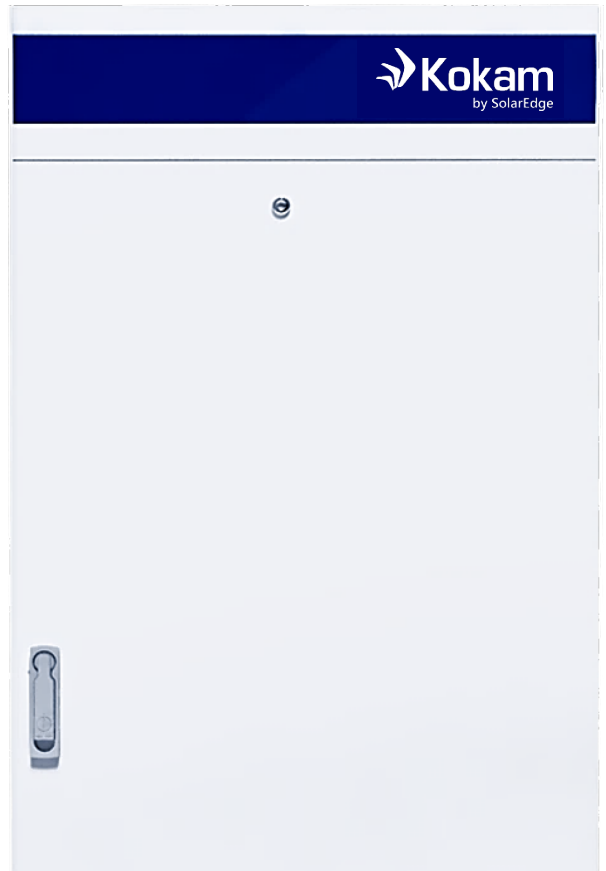

- › Highly advanced lithium-ion battery solution for mission-critical applications
- › Industry-leading high power performance (Up to 10 C-rate)
- › Pre-assembled solution for ease of installation and maintenance
- › Exceedingly small footprint due to high energy density
- › 2-pole and 3-pole topology available
- › High reliability and unparalleled safety
- › Long cycle and calendar life (Over 8,000 cycles and up to 15 years*)
- › Highly intelligent BMS** for sophisticated system control and monitoring

*Depending on the load profile, the warranty condition may differ / **BMS: Battery Management System

Battery Rack Specification

Model: KUPSI-1C4RT2-38-UP

Item	Specification	Remarks	
Electrical			
Rack Configuration	4 modules in series	Cell: 130255255P (75Ah)	
Module Configuration	1P35S	-	
Installed Energy	38kWh	-	
Usable Energy	35kWh	@ 1P discharge, BOL	
Nominal Voltage	518Vdc	-	
Operating Voltage Range	448 ~ 578Vdc	-	
Float Voltage	578Vdc	-	
Max. Charge Power	77kW	@ 2P, 1 Cycle	
Max. Charge Current	150A	@ 2C, 1 Cycle	
Rated Charge Power	38kW	@ 1P	
Rated Charge Current	75A	@ 1C	
Max. Discharge Power	388kW	@ 10P, ≤6 min., 1 Cycle	
Max. Discharge Current	750A	@ 10C, ≤6 min., 1 Cycle	
Rated Discharge Power	38kW	@ 1P	
Rated Discharge Current	75A	@ 1C	
Round Trip DC Efficiency	>95%	@ 1P, BOL	
Control Power	AC 100~240V, 50/60Hz	1ph, 2 wire	
Mechanical			
Dimension	580 (W) x 740 (D) x 1,960 (H) mm	-	
Weight	Approx. 600kg	-	
IP Grade	20	-	
Communication			
Communication Interface	Ethernet/RS-485	ModBus TCP/ModBus RTU	
Monitoring	RS-232C	-	
Environment			
Operating Temperature	Charging	0 ~ 10°C	@ <0.2P
		10 ~ 35°C	@ <2P
		35 ~ 45°C	@ <1P
	Discharging	0 ~ 55°C	-
Operating Temperature		18 ~ 28°C	Recommended
Storage Humidity		<60 ± 25% RH	Non-condensing
Storage Temperature	1 year	-20 ~ 25°C	SOC 50 ± 5%
	6 months	25 ~ 35°C	
	3 months	35 ~ 45°C	
	<1 week	45 ~ 60°C	
Expected Cycle & Calendar Life**			
Cycle Life @ DoD 90%	≥6,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Cycle Life @ DoD 80%	≥8,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Calendar Life	Up to 15 years	-	
Certifications			
Certifications	UL1642, UL1973, CE, UN38.3	@ Cell level	

*P : Power-rate / C : Current-rate


**Depending on the load profile, the warranty condition may differ

DISCLAIMERS OF WARRANTIES:

All materials and services on this document are provided "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose, or the warranty of non-infringement. This document could include technical or other mistakes, inaccuracies or typographical errors. Kokam assumes no responsibility for errors or omissions in the information, documents, software, materials and/or services which are referenced by or linked to this document. Kokam does not grant any express or implied right to any person or business entity under any patents, copyrights, trademarks, or trade secret information with respect to the materials and services. No portion of the information or documents may be reproduced in any form or by any means without the prior written consent of kokam. In no event shall kokam be liable to any person or business entity for any special, punitive, incidental, indirect or consequential damages based on any use of this document.

Ultra High Power Type

44kWh Battery Rack

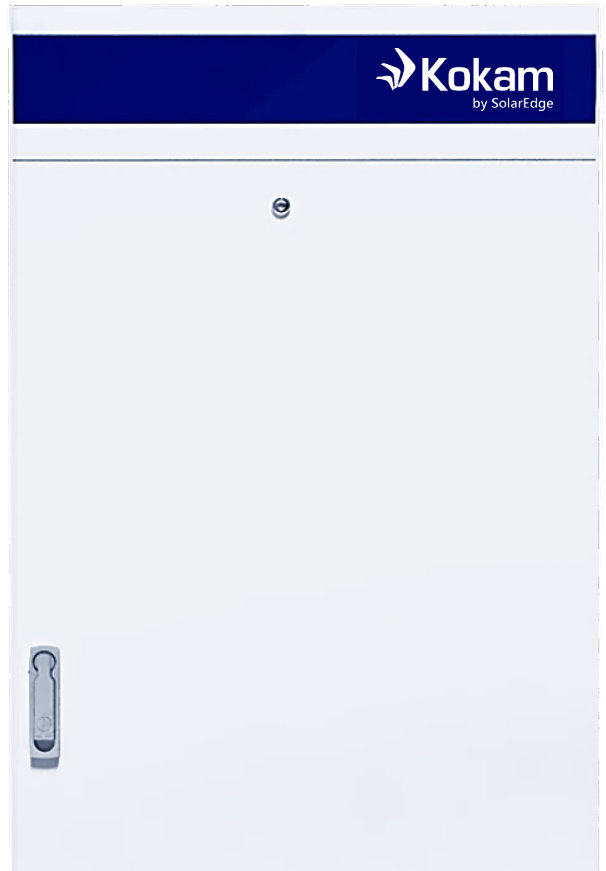

- › Highly advanced lithium-ion battery solution for mission-critical applications
- › Industry-leading high power performance (Up to 10 C-rate)
- › Pre-assembled solution for ease of installation and maintenance
- › Exceedingly small footprint due to high energy density
- › 2-pole and 3-pole topology available
- › High reliability and unparalleled safety
- › Long cycle and calendar life (Over 8,000 cycles and up to 15 years*)
- › Highly intelligent BMS** for sophisticated system control and monitoring

*Depending on the load profile, the warranty condition may differ / **BMS: Battery Management System

Battery Rack Specification

Model: KUPSI-2C5RT2-44-UP

Item	Specification	Remarks	
Electrical			
Rack Configuration	5 modules in series	Cell: 130255255P (75Ah)	
Module Configuration	1P32S	-	
Installed Energy	44kWh	-	
Usable Energy	40kWh	@ 1P discharge, BOL	
Nominal Voltage	592Vdc	-	
Operating Voltage Range	512 ~ 660Vdc	-	
Float Voltage	660Vdc	-	
Max. Charge Power	88kW	@ 2P, 1 Cycle	
Max. Charge Current	150A	@ 2C, 1 Cycle	
Rated Charge Power	44kW	@ 1P	
Rated Charge Current	75A	@ 1C	
Max. Discharge Power	44kW	@ 10P, ≤6 min., 1 Cycle	
Max. Discharge Current	750A	@ 10C, ≤6 min., 1 Cycle	
Rated Discharge Power	44kW	@ 1P	
Rated Discharge Current	75A	@ 1C	
Round Trip DC Efficiency	>95%	@ 1P, BOL	
Control Power	AC 100~240V, 50/60Hz	1ph, 2 wire	
Mechanical			
Dimension	780 (W) x 676 (D) x 1,900 (H) mm	-	
Weight	Approx. 700kg	-	
IP Grade	20	-	
Communication			
Communication Interface	Ethernet/RS-485	ModBus TCP/ModBus RTU	
Monitoring	RS-232C	-	
Environment			
Operating Temperature	Charging	0 ~ 10°C	@ <0.2P
		10 ~ 35°C	@ <2P
		35 ~ 45°C	@ <1P
	Discharging	0 ~ 55°C	-
Operating Temperature		18 ~ 28°C	Recommended
Storage Humidity		<60 ± 25% RH	Non-condensing
Storage Temperature	1 year	-20 ~ 25°C	SOC 50 ± 5%
	6 months	25 ~ 35°C	
	3 months	35 ~ 45°C	
	<1 week	45 ~ 60°C	
Expected Cycle & Calendar Life**			
Cycle Life @ DoD 90%	≥6,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Cycle Life @ DoD 80%	≥8,000 cycles	@ 25±3°C, 1C/1C, SOH 70%	
Calendar Life	Up to 15 years	-	
Certifications			
Certifications	UL1642, UL1973, CE, UN38.3	@ Cell level	

*P : Power-rate / C : Current-rate

**Depending on the load profile, the warranty condition may differ

DISCLAIMERS OF WARRANTIES:

All materials and services on this document are provided "as is" without warranty of any kind, either express or implied, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose, or the warranty of non-infringement. This document could include technical or other mistakes, inaccuracies or typographical errors. Kokam assumes no responsibility for errors or omissions in the information, documents, software, materials and/or services which are referenced by or linked to this document. Kokam does not grant any express or implied right to any person or business entity under any patents, copyrights, trademarks, or trade secret information with respect to the materials and services. No portion of the information or documents may be reproduced in any form or by any means without the prior written consent of kokam. In no event shall kokam be liable to any person or business entity for any special, punitive, incidental, indirect or consequential damages based on any use of this document.